


## Expanded metal XS Styles

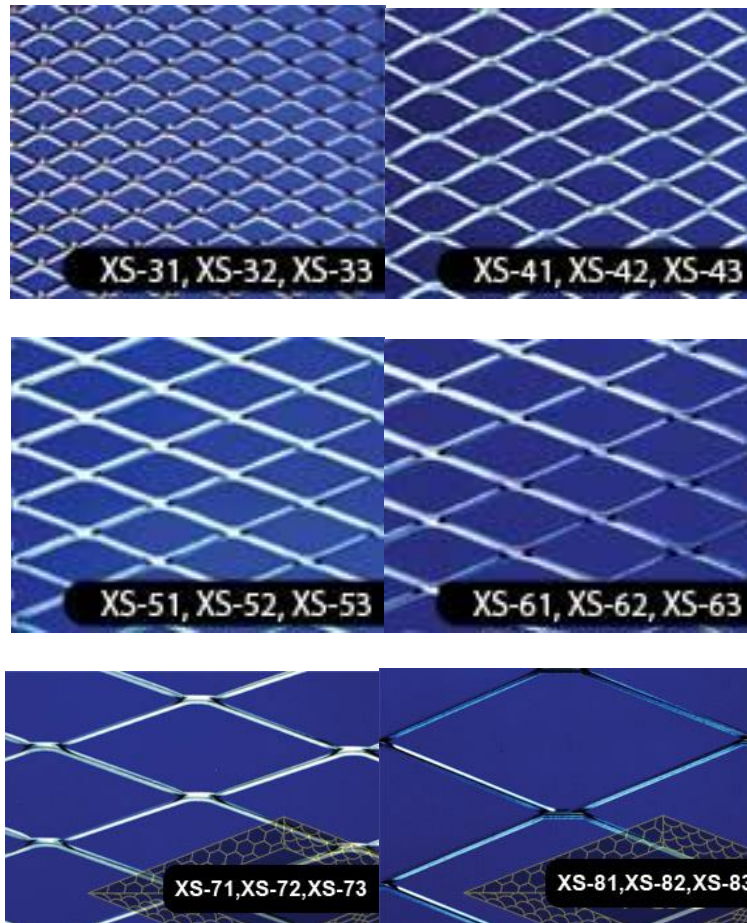


### Specification

	Short Way	Long Way	Weight				
			of Dimond	of Dimond	Thickness	Width	Per Sheet
							(kg.)
(SWD)	(LWD)	(T)	(W)	(LWM)(SWM)			
XS-31	12 mm ( 0.472 " )	30.5 mm ( 1.201 " )	1.2 mm ( 0.047 " )	1.5 mm ( 0.059 " )	5.3 kg.		
XS-32	12 mm	30.5 mm	1.6 mm	2.0 mm	9.0 kg.		

	( 0.472 " )	( 1.201 " )	( 0.063 " )	( 0.079 " )	
XS-33	12 mm ( 0.472 " )	30.5 mm ( 1.201 " )	2.3 mm ( 0.091 " )	3.0 mm ( 0.118 " )	19.1 kg.
XS-41	22 mm ( 0.866 " )	50.8 mm ( 2.000 " )	1.6 mm ( 0.063 " )	2.0 mm ( 0.079 " )	6.9 kg.
XS-42	22 mm ( 0.866 " )	50.8 mm ( 2.000 " )	2.3 mm ( 0.091 " )	2.5 mm ( 0.98 " )	12.4 kg.
XS-43	22 mm ( 0.866 " )	50.8 mm ( 2.000 " )	3.3 mm ( 0.126 " )	3.5 mm ( 0.138 " )	24.2 kg.
XS-51	25 mm ( 0.984 " )	61 mm ( 2.402 " )	1.6 mm ( 0.063 " )	2.5 mm ( 0.079 " )	7.6 kg.
XS-52	25 mm ( 0.984 " )	61 mm ( 2.402 " )	2.3 mm ( 0.091 " )	3.0 mm ( 0.098 " )	13.1 kg.
XS-53	25 mm ( 0.984 " )	61 mm ( 2.402 " )	3.2 mm ( 0.126 " )	4.0 mm ( 0.138 " )	24.2 kg.
XS-61	34 mm ( 1.339 " )	76.2 mm ( 3.000 " )	2.3 mm ( 0.091 " )	3.0 mm ( 0.118 " )	9.6 kg.
XS-62	34 mm ( 1.339 " )	76.2 mm ( 3.000 " )	3.2 mm ( 0.126 " )	4.0 mm ( 0.157 " )	17.8 kg.
XS-63	34 mm ( 1.339 " )	76.2 mm ( 3.000 " )	4.5 mm ( 0.177 " )	5.0 mm ( 0.197 " )	31.3 kg.
XS-71	50 mm ( 1.969 " )	152.4 mm ( 6.000 " )	2.3 mm ( 0.091 " )	3.5 mm ( 0.138 " )	7.5 kg.
XS-72	50 mm ( 1.969 " )	152.4 mm ( 6.000 " )	3.2 mm ( 0.126 " )	4.0 mm ( 0.157 " )	12.0 kg.
XS-73	50 mm ( 1.969 " )	152.4 mm ( 6.000 " )	4.5 mm ( 0.177 " )	5.0 mm ( 0.197 " )	21.0 kg.
XS-81	75 mm ( 2.953 " )	203.2 mm ( 8.000 " )	3.2 mm ( 0.126 " )	4.0 mm ( 0.157 " )	8.1 kg.

XS-82	75 mm ( 2.953 " )	203.2 mm ( 8.000 " )	4.5 mm ( 0.177 " )	5.0 mm ( 0.197 " )	14.2 kg.
XS-83	75 mm ( 2.953 " )	203.2 mm ( 8.000 " )	6 mm ( 0.236 " )	6.0 mm ( 0.236 " )	22.8 kg.

## Expanded metal G Styles

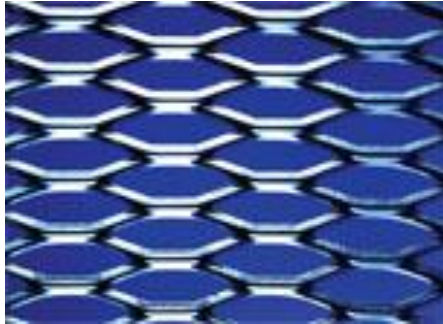



### Specification

	Short Way	Long Way			Weight Per Sheet
	of Dimond	of Dimond	Thickness	Width	4 feet x 8 feet
	(SWD)	(LWD)	(T)	(W)	(LWM)(SWM)
G-1	23.0 mm	122 mm	3.2 mm	7.0 mm	43.2 kg.
G-2	23.0 mm	122 mm	4.5 mm	7.0 mm	61.0 kg.
G-5	9.0 mm	44 mm	1.6 mm	1.6 mm	20.8 kg.
G-10	15.0 mm	50.0 mm	1.6 mm	5.0 mm	25 kg.
G-12	14.0 mm	158.0 mm	1.6 mm	3.5 mm	18.7 kg.

**Application:**

## Expanded metal XG Styles

### Expanded metal XG Styles

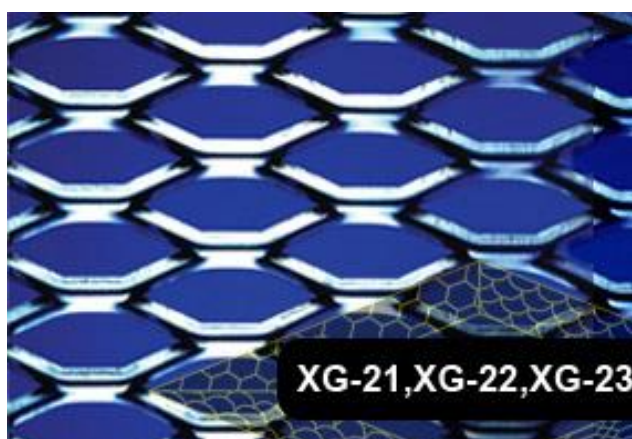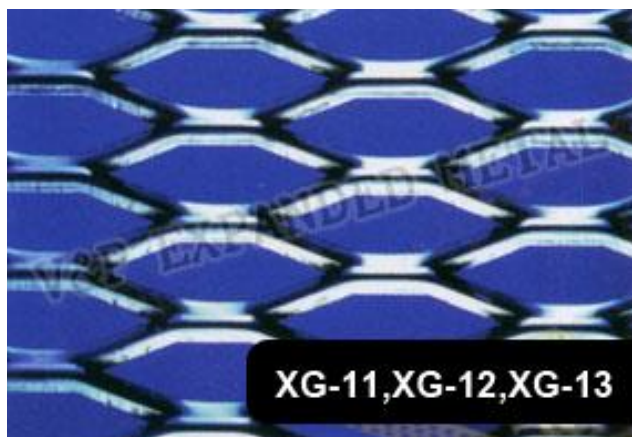

### Specification

	Short Way	Long Way	Weight			
			of Dimond	Thickness	Width	Per Sheet
						(SWD)
XG-11	34 mm ( 1.339 " )	135.4 mm ( 5.331 " )	4.5 mm ( 0.177 " )	7.0 mm ( 0.276 " )	41 kg.	
XG-12	34 mm ( 1.339 " )	135.4 mm ( 5.331 " )	6.0 mm ( 0.236 " )	7.0 mm ( 0.276 " )	55 kg.	

XG-13	34 mm ( 1.339 " )	135.4 mm ( 5.331 " )	6.0 mm ( 0.236 " )	9.0 mm ( 0.354 " )	71 kg.
XG-21	36 mm ( 1.417 " )	101.6 mm ( 4.000 " )	4.5 mm ( 0.177 " )	7.0 mm ( 0.276 " )	36 kg.
XG-22	36 mm ( 1.417 " )	101.6 mm ( 4.000 " )	6.0 mm ( 0.236 " )	7.0 mm ( 0.276 " )	48 kg.
XG-23	36 mm ( 1.417 " )	101.6 mm ( 4.000 " )	6.0 mm ( 0.236 " )	9.0 mm ( 0.354 " )	67 kg.

### Expanded metal S Styles



### Specification

					Weight
	Short Way	Long Way	Thickness	Width	Per Sheet
	of Dimond (SWD)	of Dimond (LWD)			4 feet x 8 feet (LWM)(SWM)
S-4	40 mm ( 1.575 " )	101.6 mm ( 4.000 " )	4.5 mm ( 0.177 " )	6.0 mm ( 0.236 " )	31.5 kg.
S-6	24 mm ( 0.945 " )	40.7 mm ( 1.602 " )	2.3 mm ( 0.091 " )	3.0 mm ( 0.118 " )	13.5 kg.
		81.4 mm ( 3.205 " )			
S-14	67 mm	176 mm	2.3 mm	3.5 mm	5.7 kg.

	( 2.638 " )	( 6.929 " )	( 0.091 " )	( 0.138 " )	
S-18	30 mm ( 1.181 " )	151 mm ( 5.945 " )	2.3 mm ( 0.091 " )	3.0 mm ( 0.118 " )	10.8 kg.
S-25	20 mm ( 0.787" )	64 mm ( 2.520 " )	2.3 mm ( 0.091 " )	4.0 mm ( 0.157 " )	21.5 kg.
S-30	22 mm ( 0.866 " )	52 mm ( 2.047 " )	4.5 mm ( 0.177 " )	6.0 mm ( 0.236 " )	21.7 kg.
	58 mm ( 2.283" )	168 mm ( 6.614 " )			
S-31	42 mm ( 1.654 " )	64 mm ( 2.520 " )	3.2 mm ( 0.126 " )	4.0 mm ( 0.157 " )	14.8 kg.
		128 mm ( 5.039 " )			
S-35	25 mm ( 0.984 " )	100 mm ( 3.937 " )	3.2 mm ( 0.126 " )	4.0 mm ( 0.157 " )	24.2 kg.
S-37	40 mm ( 1.575 " )	133 mm ( 5.236 " )	3.2 mm ( 0.126 " )	6.0 mm ( 0.236 " )	22.4 kg.
S-40	33 mm ( 1.299 " )	100 mm ( 3.937 " )	2.3 mm ( 0.091 " )	3.0 mm ( 0.118 " )	9.8 kg.